


## 应用领域 | Application

- 模拟高清摄像头 | HD Analog Camera

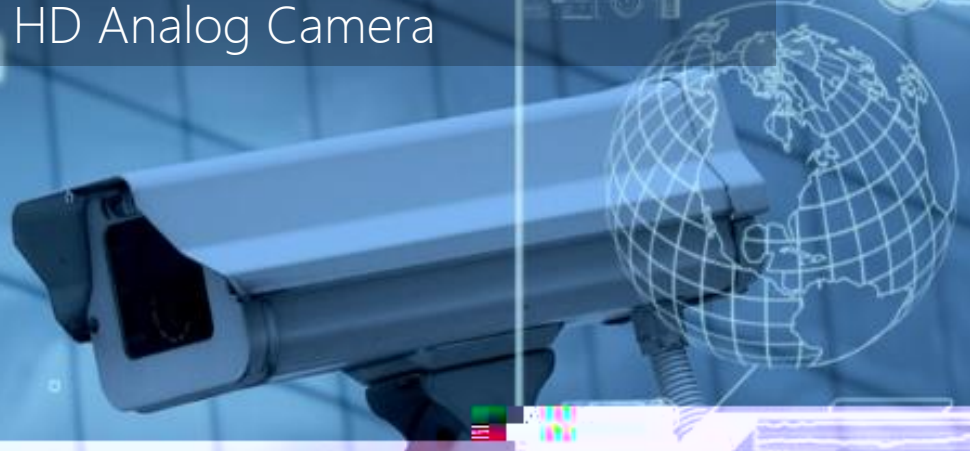

## 产品特点 | Features

- 高质量专业图像处理: 2MP  
High quality professional ISP: 2MP
- 内置Bayer/RCCB输入  
Support Bayer/RCCB input
- 支持sensor降帧输入, 更好的暗光效果  
Support lower frame rate input, for better dark image quality
- 支持去雾功能  
Support dehaze
- 支持镜头畸变矫正  
Support lens distortion correction

## 产品规格 | Specifications

CIS	Support up to 2MP inputs
	MIPI or DVP input
	RGB Bayer or RCCB
ISP	High performance CFA
	2DNR, Y/C NR, 3DNR
	Support lower frame rate input, for better dark image quality
	Dehaze
	Lens Distortion Correction
Video Output	AE/AWB/AF
	CVBS: 960H/1280H
Peripherals	HD Analog: 720P/1080P
	I2C, SPI, 2xUART, PWM, GPIO
Package	QFN56, 6mmx6mm

## 主要模块 | Block Diagram

